




ClipperCreek by Enphase HCS-60 EVSE

The high-powered, robust HCS-60 EVSE (EV Supply Equipment) is built and tested to automaker standards to provide safe and reliable Level 2 charging for residential and commercial settings.

The 25-foot-long charging cable allows for flexible installation and ease-of-use and can be neatly stowed away using the integrated cable wrap and wall-mounted J1772 holster.

The tough NEMA 4 rated enclosure ensures you can install this unit indoors or outdoors with confidence.

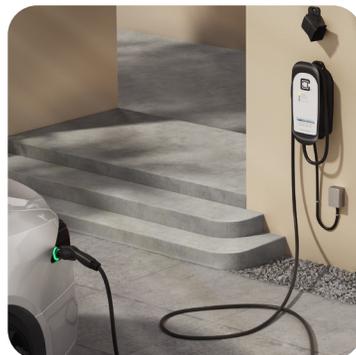

Convenient

- High-powered, Level 2 EV Charging Station charges your car up to 9x faster than the cord set that came with your electric vehicle
- Includes wall mounted J1772 connector holster
- Industry-leading 25-foot-long charging cable
- Integrated cable wrap helps to neatly stow away the cable cord when not in use
- LED lights indicate EVSE status

Durable

- Perfect for future-proofing, even if your current EV can't take advantage of the 11.5kW power output
- Rugged, fully sealed NEMA 4 station enclosure for indoor/outdoor installations

Reliable

- Provides up to 48 A charging to all J1772-compatible EVs
- Backed by a 3-year warranty and an outstanding customer service experience with ClipperCreek
- Comprehensive safety and efficiency compliance and certifications, including ENERGY STAR® Certified and ETL listing

HCS-60 Series

ELECTRICAL SPECIFICATIONS		HCS-60 (HARD-WIRED)
Input voltage/input voltage range	208/240 VAC (L-L), single-phase/185 VAC – 264 VAC	
Input voltage frequency	50/60 Hz	
Circuit breaker requirement	Dedicated, two-pole 60 A	
Input cable type	Pre-wired with (L1, L2, Gnd) 8 AWG service whip/3' (914.4 mm)	
Maximum output current/output power	48 A continuous/11.52 kW	
Output cable/cable length	Pre-wired with SAE J1772/25' (7.62 m) or 18' (5.49 m) ¹	
MECHANICAL DATA		
Enclosure dimensions (L x W x D)	19.7" x 8.9" x 5.3" (500 mm x 226 mm x 135 mm)	
Weight	17.8 lbs. (8.1 kg)	
Enclosure mounting	Wall or pedestal mounted (pedestal sold separately)	
ENVIRONMENTAL SPECIFICATIONS		
Environment rating	Indoor/outdoor rated	
Operating temperature	-22°F to 122°F (-30°C to 50°C)	
Storage temperature	-40°F to 176°F (-40°C to 80°C)	
Enclosure rating	NEMA Type 4 - watertight	
COMPLIANCE SPECIFICATIONS		
Codes and standards	NEC Article 625, SAE J1772, ENERGY STAR®, UL	
Safety compliance	UL 2594, UL 2251, UL 2231-1, UL 2231-2, UL 1998, UL 991 C22.2 No. 280-13, CSA C22.2 No. 282, CSA C22.2 No. 281.1, CSA C22.2 No. 281.2, CSA C22.2 No. 0.8	
EMC compliance	FCC Part 15 Class B	
Short-circuit protection	5000 RMS Symmetrical Amps at 240 VAC	
Open safety ground detection	Features a continuous earth ground monitor to ensure consistent connection to good earth ground	
Ground fault detection	Ground fault protection integral, CCID 20 mA, auto reset	
Auto-reclosure	System will automatically resume standard operation after minor power fault has cleared	
FEATURES		
4 LED indicators	Amber LED: Power, Green LED: Charging, 1 st Red LED: Power fault, 2 nd Red LED: Charging fault	
Warranty	3 years	
SKUs		PRODUCT DESCRIPTION
HCS-60-C16-L25-159		48 A charging, 240 VAC, 8 AWG service, 25' 8 AWG J1772 connector